



BY TIMKEN

# High-Performance Gear

## IN THIS SECTION:

- FHS Type - High Speed Close Coupled
- FHSA Type - High Speed Standard
- FHSAA Type - High Speed Precision
- FHSPAA Type - High Speed Ultra Precision
- FHSMA Type - High Speed Marine
- FAC Type - High Speed Centrifugal Pump





BY TIMKEN

# Warnings



## WARNING

***Failure to observe the following warnings could cause the power transmission product to break and parts to be thrown with sufficient force to cause serious injury or death.***

**Selection.** Do not exceed catalog ratings. Refer to the Lovejoy catalog for proper selection, sizing, horsepower, torque range, and speed range of these products.

**Installation.** Proper maintenance, handling, and shop practices are critical. Follow all installation instructions included with the product and provided by your equipment manufacturer, and all applicable federal, state, and local regulations concerning the safe operation and maintenance of manufacturing equipment.

**Operation.** Avoid sudden shock loads during start up and operation.

Do not operate a coupling assembly with improper alignment or bolt torque or with damaged or worn elastomeric elements. Inspect the assembly for these conditions shortly after initial operation and periodically thereafter.

The coupling assembly should operate quietly and smoothly. If the coupling assembly vibrates or makes a beating sound, shut down the equipment immediately and recheck the alignment.

## Disclaimer

This catalog is provided solely to give you analysis tools and data to assist you in your product selection. Product performance is affected by many factors beyond the control of Lovejoy. Therefore, you must validate the suitability and feasibility of all product selections for your applications.

**Lovejoy does not manufacture or sell power transmission products for elevators, man lifts, or other devices that carry people. We make no representation or warranty concerning such uses and disclaim all liability for harm that might result from the use of our products in those applications.**

Lovejoy products are sold subject to Lovejoy terms and conditions of sale (view at [www.lovejoy-inc.com/resources](http://www.lovejoy-inc.com/resources)), which include our limited warranty and remedy. Please consult with your Lovejoy engineer for more information and assistance.

Every reasonable effort has been made to ensure the accuracy of the information in this writing, but no liability is accepted for errors, omissions or for any other reason.

If you have any questions, contact the Lovejoy Engineering Department at 1-630-852-0500 or email [appleng@lovejoy-inc.com](mailto:appleng@lovejoy-inc.com).

Lovejoy® and SIER-BATH® are registered trademarks of Lovejoy, Inc. All other trademarks, brands, and names mentioned in this publication are property of their respective owners.



BY TIMKEN



# Table of Contents

	<b>Running Page No.</b>	<b>Section Page No.</b>
Overview .....	196.....	HP-4
FHS Type > Performance Data .....	198.....	HP-6
FHS Type > Dimensional Data.....	199.....	HP-7
FHSA Type > Performance Data.....	200.....	HP-8
FHSA Type > Dimensional Data .....	201 .....	HP-9
FHSA Type > Performance Data.....	202.....	HP-10
FHSA Type > Dimensional Data .....	203.....	HP-11
FHSPAA Type > Performance Data.....	204.....	HP-12
FHSPAA Type > Dimensional Data .....	205.....	HP-13
FHSPAA Type > Performance Data.....	206.....	HP-14
FHSPAA Type > Dimensional Data .....	207 .....	HP-15
FAC Type > Performance Data.....	208.....	HP-16
FAC Type > Dimensional Data.....	209.....	HP-17
High Speed Standard Couplings > Overview .....	210.....	HP-18
High Speed Special Couplings > Overview.....	211.....	HP-19
High Speed Spindle Couplings > Overview .....	212.....	HP-20

## Overview

### High Speed and Engineered Special Gear Couplings

The high performance group of gear couplings consists of coupling designs that require additional engineering. While standard components do exist, the unique requirements of individual applications will customize a coupling design.

#### Lovejoy® SIER-BATH® High Speed Couplings

The Lovejoy SIER-BATH F Series High Speed gear couplings are designed for exacting high speed, high efficiency performance beyond the ranges and limits of standard coupling specifications. Typical applications include high speed centrifugal and axial flow compressors, gas turbines, steam turbines, test stands, etc.

High speed couplings are dynamically balanced as assemblies and match marked. Fasteners are weigh balanced in sets. Major diameter fit gear teeth, precision machined tolerances, and high quality components help to reduce the potential unbalance in the coupling assembly. Please note components are not interchangeable between different units.

#### Features


- Dynamically balanced
- Fasteners are weigh balanced
- Body fitted bolts in reamed holes
- Precision manufactured close tolerances
- Piloted gear fit
- Hubs, sleeves, and spacers are alloy steel

#### Lovejoy Engineered Couplings

Our other product lines of engineered couplings are designed to suit special applications. Many of the components are standardized, but the special requirements of certain applications will customize each design. These couplings require specific customer input to properly design the coupling to suit the application. Please note components are not interchangeable between different units.

#### Features

- Custom design assistance
- Components are standardized, yet design flexibility allows for modifications to specific applications
- Available in coupling sizes 1 to 30 depending on model

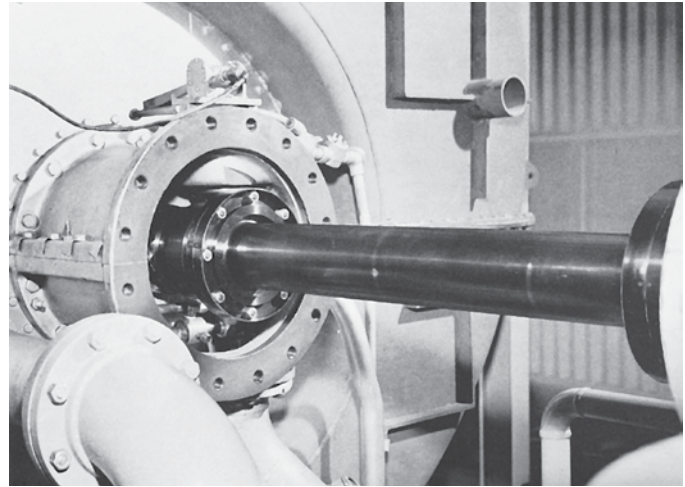

SFE



#### WARNING

***Failure to follow these cautions could create a risk of injury.***

You must refer to page HP-2 for Important Safety Instructions and Precautions for the selection and use of these products.  
Failure to follow the instructions and precautions can result in severe injury or death.

## Overview

### Lovejoy® SIER-BATH® F Type High Speed Couplings

#### FHS High Speed Close Coupled

This coupling is made from AISI 1045 steel. The design is similar to the standard “F” except the components are machined to tighter tolerances and controlled fits to allow higher operating speeds. The maximum speed is for assembly balanced couplings. Component balancing is available.

#### FHSA High Speed Standard

The Lovejoy SIER-BATH High Speed Standard gear couplings are made of alloy steel with a core hardness of RC30-35, and they are magnetic particle inspected. They are precision manufactured with ground bores and concentricity for dynamic stability. In addition, gear couplings are dynamically balanced, have a piloted gear fit, and have body-fitted bolts in reamed holes. For nitrided gear teeth, specify Class AN and a surface hardness of 85.5 minimum on the Rockwell 15N scale.

#### FHSAA High Speed Precision






The Lovejoy SIER-BATH High Speed Precision gear couplings are made of alloy steel with a core hardness of  $R_c$  30-35 and are magnetic particle inspected. They have close tolerances and precision manufactured mating surfaces with bores ground to accurate tolerances. In addition, gear couplings are dynamically balanced, have a piloted gear fit, and have body-fitted bolts in reamed holes. The low overhung moment reduces bearing loads. They also have low moment of inertia and are extremely light weight. Balancing bands will be included, if required. For nitrided gear teeth, specify Class AAN and a surface hardness of 85.5 minimum on the Rockwell 15N scale.

#### FHSPAA High Speed Ultra Precision

The Lovejoy SIER-BATH High Speed Ultra Precision gear couplings are made of Nitralloy 135 modified with a core hardness of  $R_c$  32-36 and they are magnetic particle inspected. They have close tolerances and precision manufactured mating surfaces with bores precision-ground for extremely high accuracy. In addition, they have body-fitted bolts with reamed holes. These gear couplings are dynamically balanced and have a piloted gear fit to insure balance integrity during operation. The low overhung moment reduces bearing loads. They also have low moment of inertia and are extremely lightweight. Balancing bands will be included, if required. For nitrided gear teeth, specify Class PAAN and a surface hardness of 90 minimum on the Rockwell 15N scale.

#### FHSMA High Speed Marine

The Lovejoy SIER-BATH High Speed Marine gear couplings have a core hardness of  $R_c$  30-35 and are magnetic particle inspected. They are precision manufactured with ground bores and close concentricity for dynamic stability. These couplings are dynamically balanced, have piloted gear fit, and have body-fitted bolts in reamed holes. They also have a larger shaft capacity. For nitrided gear teeth, specify Class MAN and a surface hardness of 85.5 minimum on the Rockwell 15N scale.

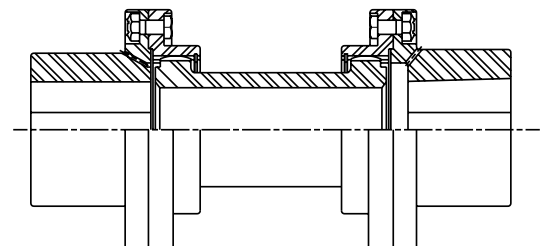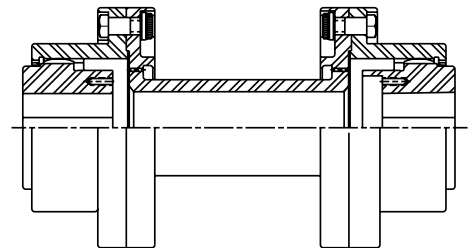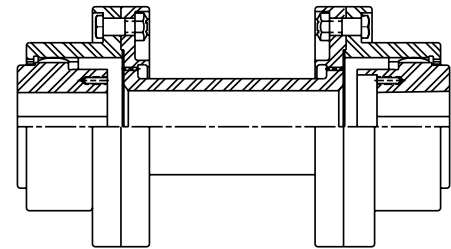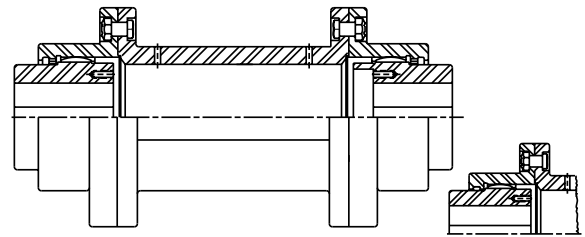

## FHS Type Performance Data

### Lovejoy® SIER-BATH® High Speed Gear Couplings

#### FHS Type High Speed Close Coupled Couplings

This coupling is made from AISI 4140 steel. The design is similar to the standard F except the components are machined to tighter tolerances and controlled fits to allow higher operating speeds. The maximum speed is for assembly balanced couplings. Component balance is available.

#### FHS Type High Speed Close Coupled Performance Data

SFE


Size	Torque		Max Speed <sup>1</sup> RPM	ID1 - ID2 Max Bore			Weight		Inertia		Torsional Stiffness		Parallel Misalignment		Max Angular Misalignment Degrees
	in-lb x 10 <sup>3</sup>	Nm x 10 <sup>3</sup>		Square Keyway in	Standard Keyway in	Metric Keyway mm	lb	kg	WR <sup>2</sup> lb-in <sup>2</sup>	GD <sup>2</sup> Nm <sup>2</sup>	in-lb/rad x 10 <sup>6</sup>	Nm/rad x 10 <sup>6</sup>	in	mm	
	<b>1</b>	7.6		0.86	14,200	1.625	1.750	42	9	4	18.9	0.2	0.91	0.10	
<b>1.5</b>	18.9	2.14	10,800	2.125	2.250	56	19	9	64.9	0.7	3.58	0.40	0.030	0.8	
<b>2</b>	31.5	3.56	9,300	2.750	2.875	73	34	15	149.8	1.7	8.33	0.94	0.043	1.1	
<b>2.5</b>	56.7	6.41	7,800	3.250	3.375	85	54	25	339.8	3.9	15.61	1.76	0.052	1.3	
<b>3</b>	94.5	10.68	6,900	4.000	4.250	107	80	35	656.4	7.5	28.04	3.17	0.058	1.5	
<b>3.5</b>	151.2	17.08	5,900	4.625	4.875	125	130	59	1,482.6	17.0	43.99	4.97	0.066	1.7	
<b>4</b>	220.5	24.92	5,200	5.375	5.625	145	190	86	2,722.0	31.2	66.09	7.47	0.075	1.9	
<b>4.5</b>	302.4	34.17	4,800	6.000	6.500	165	250	114	4,285.7	49.2	93.31	10.54	0.088	2.2	
<b>5</b>	434.7	49.12	4,200	6.500	7.000	180	380	173	8,262.5	94.8	128.00	14.46	0.101	2.6	
<b>5.5</b>	573.3	64.78	3,900	7.250	7.500	200	520	236	12,779.9	146.7	161.00	18.19	0.111	2.8	
<b>6</b>	749.7	84.71	3,600	8.000	8.250	225	650	295	17,258.7	198.1	222.00	25.08	0.080	2.0	
<b>7</b>	1,008.0	113.90	3,100	9.000	9.500	255	950	431	32,162.1	369.2	341.00	38.53	0.091	2.3	

- Notes:
- 1 indicates: Maximum Speed is based on safe rim stresses and assembly balanced.
  - Angular misalignment is reduced to +/- 3/4° per gear mesh for sizes 1 thru 5.5 and +/- 1/2° per gear mesh for sizes 6 and 7.
  - Weight and inertia are based on maximum bore.

## FHS Type Dimensional Data

### Lovejoy® SIER-BATH® High Speed Gear Couplings

#### FHS Type High Speed Close Coupled Couplings

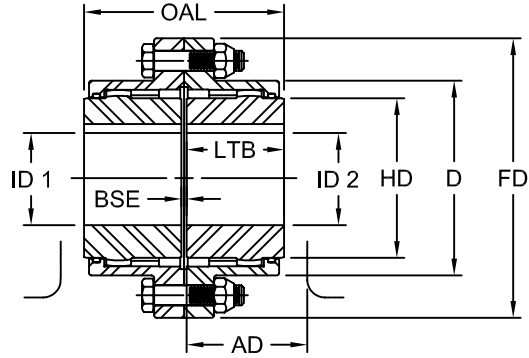

#### FHS Type Dimensional Data

Size	OAL in	ID1 - ID2 Max Bore			LTB in	BSE in	AD in	FD in	D in	HD in
		Square Keyway in	Standard Keyway in	Metric Keyway mm						
1	3.50	1.625	1.750	42	1.69	0.13	2.04	4.56	3.06	2.31
1.5	4.00	2.125	2.250	56	1.94	0.13	2.32	6.00	3.97	3.00
2	5.00	2.750	2.875	73	2.44	0.13	2.94	7.00	4.86	4.00
2.5	6.25	3.250	3.375	85	3.03	0.19	3.47	8.38	5.84	4.63
3	7.38	4.000	4.250	107	3.59	0.19	3.97	9.44	6.84	5.63
3.5	8.63	4.625	4.875	125	4.19	0.25	4.57	11.00	7.91	6.50
4	9.75	5.375	5.625	145	4.75	0.25	5.00	12.50	9.25	7.50
4.5	10.94	6.000	6.500	165	5.31	0.31	5.50	13.63	10.38	8.50
5	12.38	6.500	7.000	180	6.03	0.31	6.34	15.31	11.56	9.50
5.5	14.13	7.250	7.500	200	6.91	0.31	7.04	16.75	12.72	10.50
6	15.13	8.000	8.250	225	7.41	0.31	8.35	18.00	14.00	11.50
7	17.75	9.000	9.500	255	8.69	0.38	9.82	20.75	15.75	13.00

Note: ■ Shrouded bolt available on sizes 1 – 5 and recommended for speeds greater than 3600 RPM.

## FHSA Type Performance Data

### Lovejoy® SIER-BATH® High Speed Gear Couplings

#### FHSA Type High Speed Standard

The High Speed Standard gear couplings are made of alloy steel with a core hardness of HRC 30-35 and are magnetic particle inspected. They are precision manufactured with ground bores and concentricity for dynamic stability. In addition, the gear couplings are dynamically balanced, have a piloted gear fit and have body fitted bolts in reamed holes. For nitrided gear teeth specify Class AN and a surface hardness of 85.5 minimum on the Rockwell 15N scale.

#### FHSA Type High Speed Standard Performance Data

Size	Torque		Max Speed RPM	ID1 - ID2		Nominal BSE		Weight		Inertia		Torsional Stiffness		Max Angular Misalignment Degrees
	in-lb x 10 <sup>3</sup>	Nm x 10 <sup>3</sup>		Max Bore						WR <sup>2</sup> lb-in <sup>2</sup>	GD <sup>2</sup> Nm <sup>2</sup>	in-lb/rad x 10 <sup>6</sup>	Nm/rad x 10 <sup>6</sup>	
				Square Keyway in	Metric Keyway mm	in	mm	lb	kg					
1.5	12.6	1.42	18,000	1.5	38	5	127.00	12.0	5.4	25.7	0.3	2.0	0.23	1/2°
2	22.6	2.55	17,000	2.0	52	5	127.00	20.1	9.1	85.4	1.0	5.1	0.58	
2.5	46.6	5.27	16,000	2.5	65	5	127.00	35.2	16.0	163.5	1.9	10.8	1.22	
3	68.0	7.68	15,000	3.0	81	5	127.00	56.0	25.4	325.0	3.7	18.3	2.07	
3.5	135.5	15.31	14,000	3.5	95	5	127.00	77.1	35.0	706.4	8.1	31.0	3.50	
4	209.9	23.72	13,000	4.0	107	7	177.80	128.7	58.4	1,573.9	18.1	43.7	4.94	
4.5	310.7	35.11	11,000	4.5	114	7	177.80	184.8	83.8	2,997.3	34.4	68.9	7.79	
5	441.0	49.83	10,000	5.0	137	7	177.80	242.6	110.0	4,639.7	53.3	89.7	10.14	
5.5	590.5	66.72	9,600	5.5	150	8	203.20	362.1	164.2	8,758.4	100.5	120.0	13.56	
6	731.0	82.60	9,000	6.0	162	8	203.20	470.1	231.2	13,797.7	158.4	157.3	17.77	

SFE

#### FHSA Type High Speed Standard Performance Data

Size	Weight						WR <sup>2</sup>					Torsional Stiffness	
	Hub	Sleeve	Spacer Per Dim S	Bolts & Nuts Per Flange	Complete Cplg Per Dim BSE	Spacer Body Per Inch	Hub	Sleeve	Spacer Per Dim S	Complete Cplg Per Dim BSE	Spacer Body Per Inch	Spacer Cplg Per BSE	Spacer Body Per Inch
	lb	lb	lb	lb	lb	lb	lb-in <sup>2</sup>	lb-in <sup>2</sup>	lb-in <sup>2</sup>	lb-in <sup>2</sup>	lb-in <sup>2</sup>	in-lb/rad x 10 <sup>6</sup>	in-lb/rad x 10 <sup>6</sup>
1.5	1.48	1.84	5.10	0.13	12.00	0.71	1.4	5.2	12.5	25.7	1.3	2.0	55
2	2.48	2.83	7.76	0.51	20.12	0.95	4.9	18.9	37.8	85.4	2.8	5.1	120
2.5	6.23	4.83	11.78	0.63	35.16	1.46	17.2	27.1	74.9	163.5	70.0	10.8	298
3	10.03	8.68	15.64	1.47	56.00	1.64	39.1	49.5	147.8	325.0	10.9	18.3	462
3.5	18.02	10.80	15.97	1.76	77.13	2.04	100.1	145.3	215.6	706.4	19.2	31.0	815
4	26.94	17.79	32.09	3.58	128.71	2.33	195.9	318.2	545.7	1,573.9	28.6	43.7	1,215
4.5	41.12	27.03	40.15	4.18	184.81	3.18	393.2	632.7	945.5	2,997.3	53.5	68.9	2,269
5	62.41	31.09	47.24	4.18	242.60	3.48	767.1	901.1	1,303.3	4,639.7	69.5	89.7	2,950
5.5	86.69	51.34	72.53	6.77	362.10	3.60	1,308.0	1,846.0	2,450.4	8,758.4	89.5	120.0	3,799
6	120.66	63.27	86.78	7.74	470.12	4.28	2,225.0	2,787.0	3,773.7	13,979.7	129.6	157.3	5,499

Notes: ■ All weights, WR<sup>2</sup> and Torsional Stiffness are based on maximum bore.  
 ■ To find the stiffness factor for a coupling assembly with a spacer "n" inches longer than standard:  
 Let kx = new stiffness factor  
 n = number of additional inches of spacer  
 ks = stiffness factor for standard coupling from table  
 ki = stiffness factor for 1 inch length of standard spacer body from table  
 Then 1/kx + n 1/ki  
 Example: What is the new stiffness factor for a size 1.5 coupling if the spacer length is 3 inches longer than standard?  
 $1/kx = 1/2 + 3 \times 1/55 = 0.55454$ . kx = 1.803  
 If coupling spacer is shorter than standard, the formula becomes  $1/kx = 1/ks - n 1/ki$ .




## FHSA Type

### Dimensional Data

## Lovejoy® SIER-BATH® High Speed Gear Couplings

### FHSA Type High Speed Standard Couplings

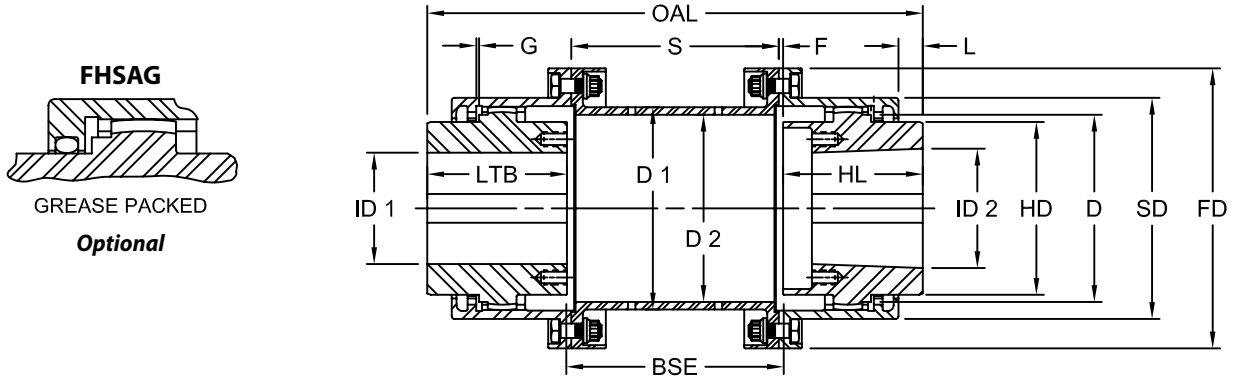

### FHSA Type Dimensional Data

Size	OAL in	S in	L in	G in	F in	ID1 - ID2 Max Bore in	LTB in	HL in	BSE in	FD in	SD in	D in	HD in	D1 in	D2 in	Bolts Per Flange	
																Qty	Size
1.5	9.13	4.81	0.50	0.06	0.09	1.5	2.06	2.06	5	4.56	3.06	2.38	2.19	3.00	2.41	6	1/4
2	8.88	4.81	0.66	0.06	0.09	2.0	2.44	2.44	5	6.00	3.97	3.06	2.88	3.75	3.13	8	3/8
2.5	11.06	4.81	0.75	0.06	0.09	2.5	3.03	3.03	5	7.00	4.91	3.88	3.63	4.75	4.00	10	3/8
3	12.19	4.81	0.81	0.09	0.09	3.0	3.59	3.59	5	8.38	5.91	4.69	4.25	5.50	4.78	10	1/2
3.5	13.38	4.81	1.00	0.09	0.09	3.5	4.19	4.19	5	9.44	6.91	5.63	5.25	6.50	5.75	12	1/2
4	16.50	6.75	1.06	0.09	0.13	4.0	4.75	4.75	7	11.00	7.91	6.38	6.00	7.38	6.63	12	5/8
4.5	17.63	6.75	1.13	0.13	0.13	4.5	5.31	5.31	7	12.50	9.25	7.25	6.88	8.63	7.75	14	5/8
5	19.06	6.75	1.31	0.13	0.13	5.0	6.03	6.03	7	13.63	10.38	8.25	7.75	9.38	8.50	14	5/8
5.5	21.25	7.75	1.38	0.13	0.13	5.5	6.63	6.63	8	15.31	11.56	9.25	8.75	10.38	9.96	14	5/8
6	22.75	7.75	1.50	0.13	0.13	6.0	7.38	7.38	8	16.75	12.81	10.25	9.63	11.44	10.96	16	3/4

## FHSAA Type Performance Data

### Lovejoy® SIER-BATH® High Speed Gear Couplings

#### FHSAA Type High Speed Precision

The High Speed Precision gear couplings are made of alloy steel with a core hardness of HRC 30-35 and are magnetic particle inspected. They have close tolerances and precision manufactured mating surfaces with bores ground to accurated tolerance. In addition, gear couplings are dynamically balanced, have a piloted gear fit and have body fitted bolts in reamed holes. The low overhung moment reduces bearing loads. They also have a low moment of inertia and are extremely light weight. Balancing bands will be included if required. For nitrided gear teeth, specify ANN and a surface hardness of 85.56 minimum in the Rockwell 15N scale.

#### FHSAA Type High Speed Precision Performance Data

SFE

Size	Torque		Max Speed RPM	ID1 - ID2		Nominal BSE		Weight		Inertia		Torsional Stiffness		Max Angular Misalignment Degrees
	in-lb x 10 <sup>3</sup>	Nm x 10 <sup>3</sup>		Max Bore						WR <sup>2</sup> lb-in <sup>2</sup>	GD <sup>2</sup> Nm <sup>2</sup>	in-lb/rad x 10 <sup>6</sup>	Nm/rad x 10 <sup>6</sup>	
				Square Keyway in	Metric Keyway mm	in	mm	lb	kg					
1.5	18.9	2.14	20,000	1.625	42	5	127.0	15.2	6.9	35.5	0.4	1.7	19.00	1/2°
2	28.3	3.20	18,700	2.125	56	5	127.0	25.9	11.8	76.9	0.9	4.0	0.45	
2.5	63.0	7.12	17,600	2.625	70	5	127.0	36.9	16.8	189.8	2.2	9.0	1.02	
3	100.8	11.39	16,500	3.125	84	7	177.8	60.2	27.3	389.8	4.5	12.2	1.38	
3.5	151.2	17.08	15,400	3.625	97	7	177.8	78.5	35.6	659.3	7.6	20.2	2.28	
4	220.6	24.93	14,300	4.125	111	8	203.2	113.3	51.4	1,169.4	13.4	29.7	3.36	
4.5	330.8	37.38	12,100	4.625	124	8	203.2	163.2	74.0	2,178.2	25.0	47.2	5.33	
5	479.0	54.12	11,000	5.125	140	10	254.0	239.5	108.6	4,116.6	47.3	69.4	7.84	
5.5	617.6	69.79	10,500	5.625	150	10	254.0	317.6	144.1	6,719.7	77.1	92.1	10.41	
6	813.0	91.86	9,900	6.125	170	10	254.0	398.4	180.7	8,993.1	103.2	123.3	13.93	

#### FHSAA Type High Speed Precision Performance Data

Size	Weight						WR <sup>2</sup>					Torsional Stiffness	
	Hub lb	Sleeve lb	Spacer Per Dim S lb	Bolts & Nuts Per Flange lb	Complete Cplg Per Dim BSE lb	Spacer Body Per Inch lb	Hub lb-in <sup>2</sup>	Sleeve lb-in <sup>2</sup>	Spacer Per Dim S lb-in <sup>2</sup>	Complete Cplg Per Dim BSE lb-in <sup>2</sup>	Spacer Body Per Inch lb-in <sup>2</sup>	Spacer Cplg Per BSE in-lb/rad x 10 <sup>6</sup>	Spacer Body Per Inch in-lb/rad x 10 <sup>6</sup>
1.5	2.22	2.18	5.48	0.47	15.22	0.39	2.8	7.5	14.9	35.5	0.3	1.7	12
2	3.81	5.00	7.28	0.51	25.92	0.52	7.7	16.2	29.1	76.9	0.7	4.0	31
2.5	6.96	5.63	10.50	0.63	36.94	0.69	23.7	40.0	62.4	189.8	1.7	9.0	72
3	11.79	8.69	16.32	1.47	60.22	1.02	51.1	82.7	122.2	389.8	3.5	12.2	148
3.5	18.31	10.34	17.72	1.76	78.54	1.27	104.6	141.1	167.9	659.3	6.6	20.2	281
4	25.50	13.80	25.20	3.58	113.32	1.54	218.0	204.7	324.0	1,169.4	11.9	29.7	508
4.5	39.99	19.76	36.50	4.18	163.16	2.36	387.3	408.5	586.4	2,178.2	21.7	47.2	923
5	59.32	29.48	52.54	4.15	239.50	3.23	738.9	797.8	1,043.1	4,116.6	42.5	69.4	1,804
5.5	79.84	38.06	68.26	6.77	317.60	3.56	1,196.3	1,259.6	1,807.7	6,719.7	57.1	92.1	2,422
6	99.66	52.87	77.86	7.74	398.40	3.89	1,774.2	2,089.4	2,465.8	8,993.1	74.6	123.3	3,167

Notes: ■ All weights, WR<sup>2</sup> and Torsional Stiffness are based on maximum bore.  
 ■ To find the stiffness factor for a coupling assembly with a spacer "n" inches longer than standard:

Let kx = new stiffness factor  
 n = number of additional inches of spacer  
 ks = stiffness factor for standard coupling from table  
 ki = stiffness factor for 1 inch length of standard spacer body from table

Then 1/kx + n 1/ki

Example: What is the new stiffness factor for a size 1.5 coupling if the spacer length is 3 inches longer than standard?


$$1/kx = 1/21.7 + 3 \times 1/12 = 0.83823, kx = 1.192$$

If coupling spacer is shorter than standard, the formula becomes 1/kx = 1/ks - n 1/ki.

## FHSAA Type Dimensional Data

### Lovejoy® SIER-BATH® High Speed Gear Couplings

#### FHSAA Type High Speed Precision Couplings

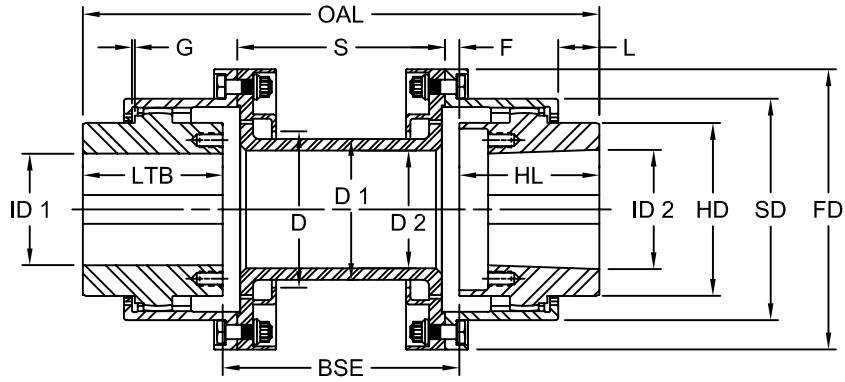

#### FHSAA Type Dimensional Data

Size	OAL in	L in	F in	S in	G in	ID1-ID2 Max Bore in	HL in	LT in	BSE in	FD in	SD in	D in	HD in	D1 in	D2 in	Bolts Per Flange	
																Qty	Size
1.5	9.25	0.19	0.09	4.44	0.06	1.625	2.13	2.13	5	5.00	3.50	2.50	2.56	2.00	1.50	8	5/16
2	10.00	0.25	0.09	4.44	0.06	2.125	2.50	2.50	5	5.88	4.31	3.19	3.19	2.63	2.13	8	3/8
2.5	11.25	0.25	0.09	4.44	0.06	2.625	3.13	3.13	5	6.88	5.31	4.00	4.00	3.38	2.88	10	3/8
3	14.25	0.25	0.09	6.44	0.09	3.125	3.63	3.63	7	8.19	6.13	4.69	4.75	4.00	3.38	10	1/2
3.5	15.50	0.25	0.09	6.44	0.09	3.625	4.25	4.25	7	9.00	7.00	5.56	5.50	4.88	4.25	12	1/2
4	17.75	0.25	0.09	7.44	0.09	4.125	4.88	4.88	8	10.00	7.88	6.75	6.38	5.88	5.25	12	5/8
4.5	19.00	0.38	0.09	7.44	0.09	4.625	5.50	5.50	8	11.63	9.13	7.38	7.00	6.50	5.63	12	5/8
5	22.50	0.50	0.09	9.44	0.09	5.125	6.25	6.25	10	13.00	10.50	8.75	7.13	7.75	6.75	14	5/8
5.5	23.50	0.50	0.09	9.44	0.09	5.625	6.75	6.75	10	14.50	11.50	9.50	8.75	8.50	7.50	14	3/4
6	24.50	0.50	0.09	9.44	0.09	6.125	7.25	7.25	10	15.75	12.75	10.44	9.38	9.25	8.25	16	3/4

## FHSPAA Type Performance Data

### Lovejoy® SIER-BATH® High Speed Gear Couplings

#### FHSPAA Type High Speed Ultra Precision

The High Speed Ultra Precision gear couplings are made of Nit alloy 135 modified with a core hardness of HRC 32-36 and are magnetic particle inspected. They have close tolerances and precision manufactured mating surfaces with bores precision-ground for extremely high accuracy. In addition, they have body fitted bolts with reamed holes. These gear couplings are dynamically balanced and have a piloted gear fit to insure balance integrity during operation. The low overhung moment reduces bearing loads. They also have low moment of inertia and are extremely lightweight. Balancing bands will be included, if required. For nitrided teeth, specify class PAAN and a surface hardness of 90 minimum on the Rockwell 15N scale.

#### FHSPAA Type High Speed Ultra Precision Performance Data

Size	Torque		Max Speed RPM	ID1 - ID2		Nominal BSE		Weight		Inertia		Torsional Stiffness		Max Angular Misalignment Degrees
	in-lb $\times 10^3$	Nm $\times 10^3$		Max Bore						WR <sup>2</sup> lb-in <sup>2</sup>	GD <sup>2</sup> Nm <sup>2</sup>	in-lb/rad $\times 10^6$	Nm/rad $\times 10^6$	
				Square Keyway in	Metric Keyway mm	in	mm	lb	kg					
1.5	18.9	2.14	20,000	1.625	42	5	127.0	15.2	6.9	35.5	0.4	1.7	0.19	1/2°
2	28.3	3.20	18,700	2.125	56	5	127.0	25.9	11.8	76.9	0.9	4.0	0.45	
2.5	63.0	7.12	17,600	2.625	70	5	127.0	36.9	16.8	189.8	2.2	9.0	1.02	
3	100.8	11.39	16,500	3.125	84	7	177.8	60.2	27.3	389.8	4.5	12.2	1.38	
3.5	151.2	17.08	15,400	3.625	97	7	177.8	78.5	35.6	659.3	7.6	20.2	2.28	
4	220.6	24.93	14,300	4.125	111	8	203.2	113.3	51.4	1,169.4	13.4	29.7	3.86	
4.5	330.8	37.36	12,100	4.625	124	8	203.2	163.2	74.0	2,178.0	25.0	17.2	5.33	
5	479.0	54.12	11,000	5.125	140	10	254.0	239.5	108.6	4,116.6	47.3	69.4	7.84	
5.5	617.6	69.79	10,500	5.625	150	10	254.0	317.6	144.1	6,719.7	77.1	92.1	10.41	
6	813.0	91.86	9,900	6.125	170	10	254.0	398.4	180.7	8,993.1	103.2	123.3	13.93	

#### FHSPAA Type High Speed Ultra Precision Performance Data

Size	Weight						WR <sup>2</sup>					Torsional Stiffness	
	Hub lb	Sleeve lb	Spacer Per Dim S lb	Bolts & Nuts Per Flange lb	Complete Cplg Per Dim BSE lb	Spacer Body Per Inch lb	Hub lb-in <sup>2</sup>	Sleeve lb-in <sup>2</sup>	Spacer Per Dim S lb-in <sup>2</sup>	Complete Cplg Per Dim BSE lb-in <sup>2</sup>	Spacer Body Per Inch lb-in <sup>2</sup>	Spacer Cplg Per BSE in-lb/rad $\times 10^6$	Spacer Body Per Inch in-lb/rad $\times 10^6$
1.5	2.22	2.18	5.48	0.47	15.22	0.39	2.8	7.5	14.9	35.5	0.3	1.7	12
2	3.81	5.00	7.28	0.51	25.92	0.52	7.7	16.2	29.1	76.9	0.7	4.0	31
2.5	6.96	5.63	10.50	0.63	36.94	0.69	23.7	40.0	62.4	189.8	1.7	9.0	72
3	11.79	8.69	16.32	1.47	60.22	1.02	51.1	82.7	122.2	389.8	3.5	12.2	148
3.5	18.31	10.34	17.72	1.76	78.54	1.27	104.6	141.1	167.9	659.3	6.6	20.2	281
4	28.50	13.80	25.20	3.58	113.32	1.54	218.0	204.7	324.0	1,169.4	11.9	29.7	508
4.5	39.99	19.76	36.50	4.18	163.16	2.36	387.3	408.5	586.4	2,178.2	21.7	47.2	923
5	59.82	29.48	52.54	4.18	239.50	3.23	738.9	797.8	1,043.1	4,116.6	42.5	69.4	1,804
5.5	79.84	38.06	68.26	6.77	317.60	3.56	1,196.3	1,259.6	1,807.7	6,719.7	57.1	92.1	2,422
6	99.66	52.87	77.86	7.74	398.40	3.89	1,774.2	2,089.4	2,465.8	8,993.1	74.6	123.3	3,167

Notes: ■ All weights, WR<sup>2</sup> and Torsional Stiffness are based on maximum bore.

■ To find the stiffness factor for a coupling assembly with a spacer "n" inches longer than standard:

Let  $k_x$  = new stiffness factor  
 $n$  = number of additional inches of spacer  
 $k_s$  = stiffness factor for standard coupling from table  
 $k_i$  = stiffness factor for 1 inch length of standard spacer body from table

Then  $1/k_x + n/k_i$

Example: What is the new stiffness factor for a size 1.5 coupling if the spacer length is 3 inches longer than standard?


$$1/k_x = 1/1.7 + 3 \times 1/12 = 0.83823 \dots k_x = 1.192$$

If coupling spacer is shorter than standard, the formula becomes  $1/k_x = 1/k_s - n/k_i$ .

## FHSPAA Type Dimensional Data

### Lovejoy® SIER-BATH® High Speed Gear Couplings

#### FHSPAA Type High Speed Ultra Precision Couplings

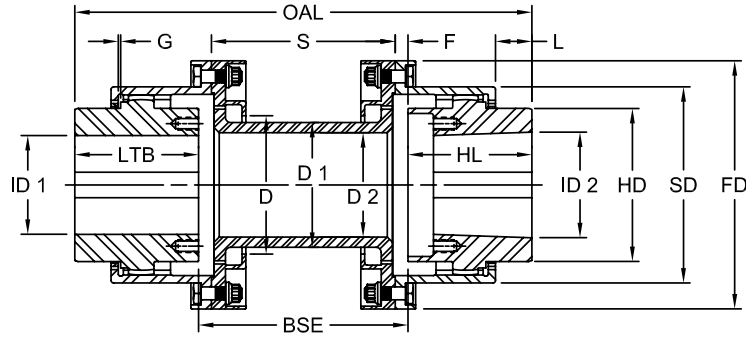

#### FHSPAA Type Dimensional Data

Size	OAL in	L in	F in	S in	G in	ID1 - ID2 Max Bore in	HL in	LTB in	BSE in	FD in	SD in	HD in	D in	D1 in	D2 in	Bolts Per Flange Qty Size	
1.5	9.25	0.19	0.09	4.44	0.06	1.625	2.13	2.13	5	5.00	3.50	2.56	2.50	2.00	1.50	8	5/16
2	10.00	0.25	0.09	4.44	0.06	2.125	2.50	2.50	5	5.88	4.31	3.19	3.19	2.63	2.13	8	3/8
2.5	11.25	0.25	0.09	4.44	0.06	2.625	3.13	3.13	5	6.88	5.31	4.00	4.00	3.38	2.88	10	3/8
3	14.25	0.25	0.09	6.44	0.09	3.125	3.63	3.63	7	8.19	6.13	4.75	4.69	4.00	3.38	10	1/2
3.5	15.50	0.25	0.09	6.44	0.09	3.625	4.25	4.25	7	9.00	7.00	5.50	5.56	4.88	4.25	12	1/2
4	17.75	0.25	0.09	7.44	0.09	4.125	4.88	4.88	8	10.00	7.88	6.38	6.75	5.88	5.25	12	5/8
4.5	19.00	0.38	0.09	7.44	0.09	4.625	5.50	5.50	8	11.63	9.13	7.00	7.38	6.50	5.63	12	5/8
5	22.50	0.50	0.09	9.44	0.09	5.125	6.25	6.25	10	13.00	10.50	7.13	8.75	7.75	6.75	14	5/8
5.5	23.50	0.50	0.09	9.44	0.09	5.625	6.75	6.75	10	14.50	11.50	8.75	9.50	8.50	7.50	14	3/4
6	24.50	0.50	0.09	9.44	0.09	6.125	7.25	7.25	10	15.75	12.75	9.38	10.44	9.25	8.25	16	3/4

## FHSMA Type Performance Data

### Lovejoy® SIER-BATH® Type High Speed Gear Couplings

#### FHSMA Type High Speed Marine

The High Speed Marine gear couplings have a core hardness of HRC 30-35 and are magnetic particle inspected. They are precision manufactured with ground bores and close concentricity for dynamic stability. These couplings are dynamically balanced, have piloted gear fit, and have body fitted bolts and reamed holes. They also have a larger shaft capacity. For nitrided gear teeth, specify Class MAN and a surface hardness of 85.5 minimum on the Rockwell 15N scale.

#### FHSMA Type High Speed Marine Performance Data

Size	Torque		Max Speed RPM	ID1 - ID2 Max Bore		Nominal BSE		Weight		Inertia		Torsional Stiffness		Max Angular Misalignment Degrees
	in-lb x 10 <sup>3</sup>	Nm x 10 <sup>3</sup>		Square Keyway in	Metric Keyway mm	in	mm	lb	kg	WR <sup>2</sup> lb-in <sup>2</sup>	GD <sup>2</sup> Nm <sup>2</sup>	in-lb/rad x 10 <sup>6</sup>	Nm/rad x 10 <sup>6</sup>	
1.5	18.9	2.14	18,000	2.125	56	5	127.0	16.6	7.5	41.2	0.5	3.3	0.37	1/2°
2	28.3	3.20	17,000	2.625	70	5	127.0	26.6	12.1	95.0	1.1	7.0	0.79	
2.5	63.0	7.12	16,000	3.125	84	5	127.0	43.0	19.5	219.6	2.5	13.7	1.55	
3	100.8	11.39	15,000	3.625	97	7	177.8	68.2	30.9	464.0	5.3	20.4	2.31	
3.5	151.2	17.08	14,000	4.625	124	7	177.8	95.1	43.2	885.2	10.2	34.2	3.86	
4	220.6	24.93	13,000	5.125	140	8	203.2	156.3	70.9	1,926.0	22.1	54.6	6.17	
4.5	330.8	37.38	11,000	5.625	150	8	203.2	229.9	104.3	3,695.7	42.4	86.2	9.74	
5	479.0	54.12	10,000	6.625	186	10	254.0	301.3	136.7	6,459.5	74.2	118.1	13.34	
5.5	617.6	69.79	9,600	7.125	192	10	254.0	396.6	179.9	10,200.7	117.1	165.8	18.73	
6	813.0	91.86	9,000	7.625	208	10	254.0	596.3	270.5	19,736.0	226.6	216.7	24.49	

#### FHSMA Type High Speed Marine Performance Data

Size	Weight						WR <sup>2</sup>					Torsional Stiffness	
	Hub lb	Sleeve lb	Spacer Per Dim S lb	Bolts & Nuts Per Flange lb	Complete Cplg Per Dim BSE lb	Spacer Body Per Inch lb	Hub lb-in <sup>2</sup>	Sleeve lb-in <sup>2</sup>	Spacer Per Dim S lb-in <sup>2</sup>	Complete Cplg Per Dim BSE lb-in <sup>2</sup>	Spacer Body Per Inch lb-in <sup>2</sup>	Spacer Cplg Per BSE in-lb/rad x 10 <sup>6</sup>	Spacer Body Per Inch in-lb/rad x 10 <sup>6</sup>
1.5	4.03	1.92	3.72	0.47	16.56	0.57	10.9	7.3	4.8	41.2	0.62	3.3	26
2	7.39	2.82	5.20	0.51	26.64	0.75	27.2	14.7	11.2	95.0	1.37	7.0	57
2.5	13.2	3.84	7.70	0.63	43.04	0.95	67.3	28.8	27.4	219.6	2.85	13.7	120
3	20.32	5.54	13.52	1.47	68.18	1.38	141.7	57.7	65.2	464.0	5.90	20.4	250
3.5	31.03	5.92	17.72	1.76	95.14	1.59	305.9	78.1	117.2	885.2	8.99	34.2	381
4	49.66	11.06	27.70	3.58	156.30	2.45	635.4	208.4	238.4	1,926.0	18.64	54.6	790
4.5	76.53	15.50	37.44	4.18	229.86	3.22	1248.4	378.7	411.5	3,696.7	33.60	86.2	1,425
5	98.66	19.12	57.40	4.18	301.32	3.61	2216.7	578.3	869.5	6,459.5	46.70	118.1	1,980
5.5	123.24	32.42	69.72	6.77	396.56	4.52	3,190.6	1,249.5	1,320.5	10,200.7	74.95	165.8	3,178
6	209.2	39.42	83.54	7.74	596.26	4.93	7,096.1	1,807.1	1,929.6	19,736.0	97.58	216.7	4,139

Notes: ■ All weights, WR<sup>2</sup> and Torsional Stiffness are based on maximum bore.

■ To find the stiffness factor for a coupling assembly with a spacer "n" inches longer than standard:

Let  $k_x$  = new stiffness factor  
 $n$  = number of additional inches of spacer  
 $k_s$  = stiffness factor for standard coupling from table  
 $k_i$  = stiffness factor for 1 inch length of standard spacer body from table

Then  $1/k_x + n 1/k_i$

Example: What is the new stiffness factor for a size 1.5 coupling if the spacer length is 3 inches longer than standard?


$$1/k_x = 1/3.3 + 3 \times 1/26 = 0.41841 \dots k_x = 2.389$$

If coupling spacer is shorter than standard, the formula becomes  $1/k_x = 1/k_s - n 1/k_i$ .

## FHSMA Type Dimensional Data

### Lovejoy® SIER-BATH® High Speed Gear Couplings

#### FHSMA Type High Speed Marine Couplings

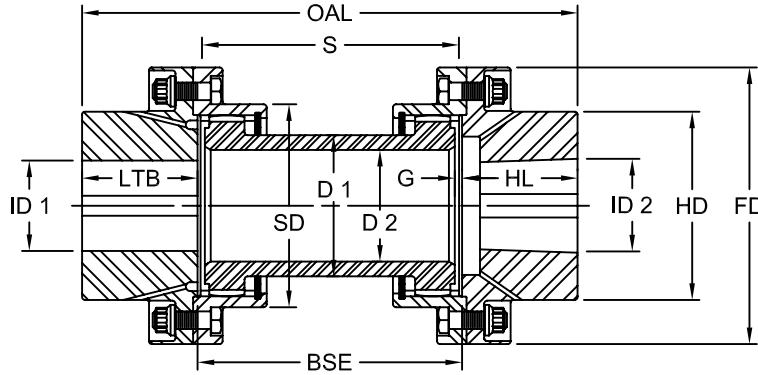

#### FHSMA Type Dimensional Data

Size	OAL in	S in	G in	ID1 - ID2 Max Bore in	HL in	LTB in	BSE in	FD in	HD in	SD in	D1 in	D2 in	Bolts Per Flange	
													Qty	Size
1.5	10.00	4.81	0.09	2.125	2.50	2.50	5	5.00	3.19	3.50	2.38	1.75	8	5/16
2	11.25	4.81	0.09	2.625	3.13	3.13	5	5.88	4.00	4.31	3.00	2.38	8	3/8
2.5	12.25	4.81	0.09	3.125	3.63	3.63	5	6.88	5.00	5.31	3.75	3.13	10	3/8
3	15.50	6.81	0.09	3.625	4.25	4.25	7	8.19	5.75	6.13	4.50	3.75	10	1/2
3.5	17.50	6.75	0.13	4.625	5.25	5.25	7	9.44	6.75	7.00	5.13	4.38	12	1/2
4	20.00	7.75	0.13	5.125	6.00	6.00	8	11.00	7.75	7.88	6.00	5.00	12	5/8
4.5	21.25	7.75	0.13	5.625	6.63	6.63	8	12.50	9.00	9.13	7.00	5.88	12	5/8
5	24.25	9.69	0.16	6.625	7.13	7.13	10	13.63	10.13	10.50	7.75	6.63	14	5/8
5.5	26.00	9.69	0.16	7.125	8.00	8.00	10	15.31	11.00	11.50	8.50	7.50	14	3/4
6	27.50	9.69	0.16	7.625	8.75	8.75	10	16.75	12.50	12.75	9.25	8.25	16	3/4

## FAC Type Performance Data

### Lovejoy® SIER-BATH® High Speed Gear Couplings

#### FAC Type Engineered Centrifugal Pump Couplings

This coupling is designed specifically for centrifugal pumps and compressors. It is easy to install and replace, efficiently designed to reduce spare part inventory and is precision manufactured.

Individual components are easy to assemble and easy to replace. Component balanced parts eliminate your need to keep complete couplings in stock. Grease seals are replaceable without major disassembly. Four sizes accommodate 80% of all normally used shaft diameters. Other features include extended time between lubrications, infinitely adjustable BSE, M-F pilot for proper fit, vertical modification, center assembly independently replaceable, and conforms to API 610 - 6th edition. Its precision balanced parts are made of high strength alloy 4140 steel. Bolts are weigh-balanced as sets.

#### FAC Type Engineered Centrifugal Pump Performance Data



Size	Torque		Max Speed		ID1 - ID2			Nominal BSE		Weight Solid		Inertia		Max Bore Parallel Misalignment		Max Angular Misalignment Degrees
	in-lb	Nm	Bal	Unbal	Square Keyway	Standard Keyway	Metric Keyway	in	mm	lb	kg	WR <sup>2</sup>	GD <sup>2</sup>	in	mm	
	x 10 <sup>3</sup>	x 10 <sup>3</sup>	RPM	RPM	in	in	mm					lb-in <sup>2</sup>	Nm <sup>2</sup>			
1	11.3	1.28	16,700	10,500	2.125	2.250	56	5	127.0	19.4	8.8	37.1	0.4	0.04	1.0	1/2°
1.5	22.7	2.56	12,700	9,000	2.813	3.000	76	7	177.8	42.2	19.1	138.9	1.6	0.06	1.5	
2	39.0	4.41	10,900	8,100	3.500	3.750	95	7	177.8	68.7	31.2	298.7	3.4	0.06	1.5	
2.5	69.3	7.83	9,100	7,200	4.250	4.500	114	7	177.8	122.0	55.3	767.3	8.8	0.06	1.5	
3	118.0	13.33	8,100	6,500	4.875	5.250	134	10	254.0	184.8	83.8	1,398.1	16.0	0.06	2.0	
3.5	177.0	20.00	6,900	5,950	5.625	6.125	157	10	254.0	288.0	130.6	3,052.7	35.0	0.06	2.0	



## FAC Type Dimensional Data

### Lovejoy® SIER-BATH® High Speed Gear Couplings

#### FAC Type Engineered Centrifugal Pump Couplings

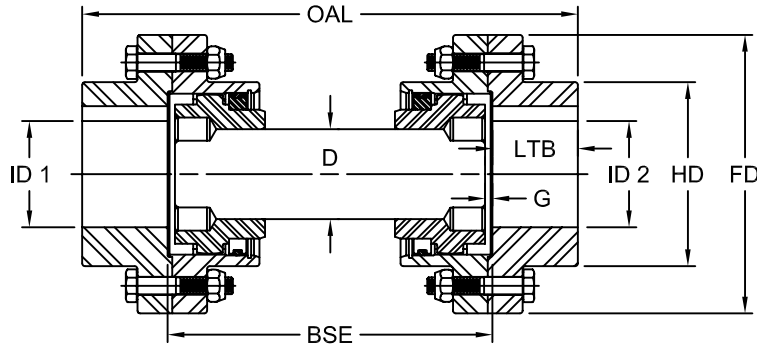

Optional Rigid Hub Design

#### FAC Type Dimensional Data


Size	OAL in	ID1 - ID2 Max Bore		LTB in	G in	BSE in	FD in	HD in	D in
		Square Keyway in	Metric Keyway mm						
1	8.12	2.125	56	1.56	0.16	5	4.56	3.06	1.25
1.5	10.69	2.813	76	1.84	0.16	7	6.00	3.97	1.94
2	11.56	3.500	95	2.28	0.16	7	7.00	4.91	2.50
2.5	12.81	4.250	114	2.91	0.19	7	8.38	5.91	3.00
3	16.81	4.875	134	3.41	0.19	10	9.44	6.91	3.75
3.5	17.88	5.625	157	3.97	0.22	10	11.00	7.91	4.50

## High Speed Standard Couplings

### Overview


### Lovejoy® SIER-BATH® F Type High Speed Standard Couplings

#### Additional Standard Designs

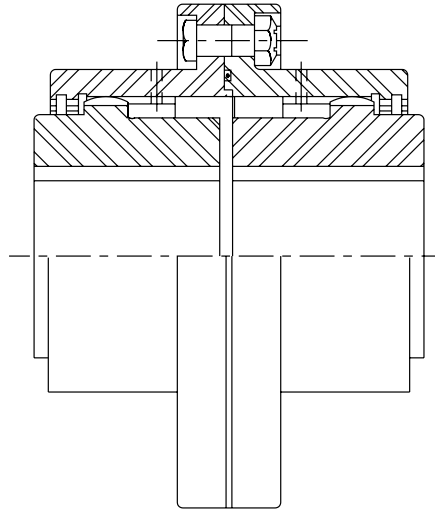


**Standard High Speed Flanged Coupling  
Continuously Lubricated**

For close coupled, continuously lubricated, high speed applications. Sizes and specifications similar to those shown on the previous pages.

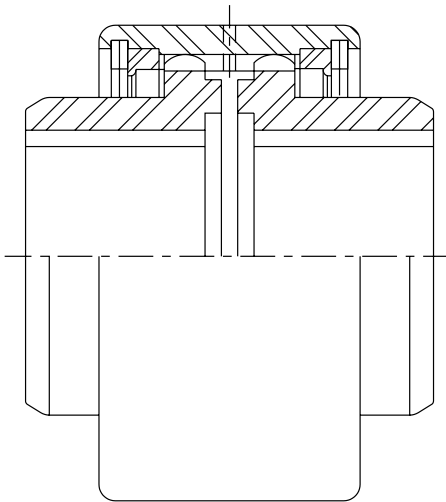

**Standard High Speed Continuous Sleeve  
Coupling  
Continuously Lubricated**

For lighter weight, close coupled, continuously lubricated applications where flange joint is not required. Materials, heat treatments, and precision manufacturing methods outlined on previous pages apply.

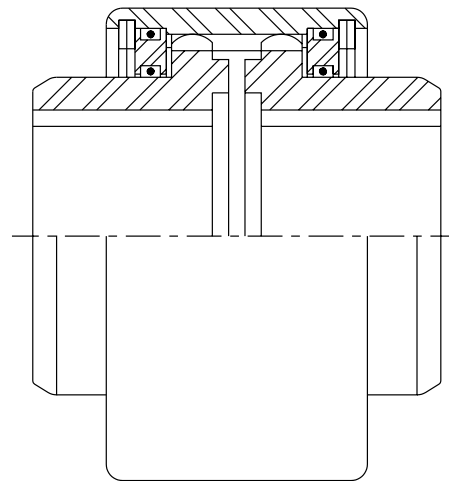

**Standard High Speed Continuous Sleeve  
Coupling  
Grease Packed**

For lighter weight, close coupled, grease packed applications where flange joint is not required. Materials, heat treatments, and precision manufacturing methods outlined on previous pages apply.

## High Speed Special Couplings



### Overview

#### Lovejoy® SIER-BATH® F Type High Speed Standard Couplings

##### Transmission Test Stand

##### High Speed Spacer Coupling

Self-contained oil lubrication, normal speed 16,000 RPM, maximum speed 25,000 RPM. The dimensions are similar to a size 2.5, with an overall length of 35 inches and a total weight of 29 lbs.

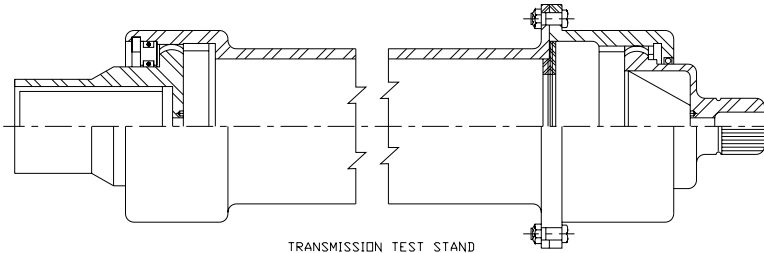
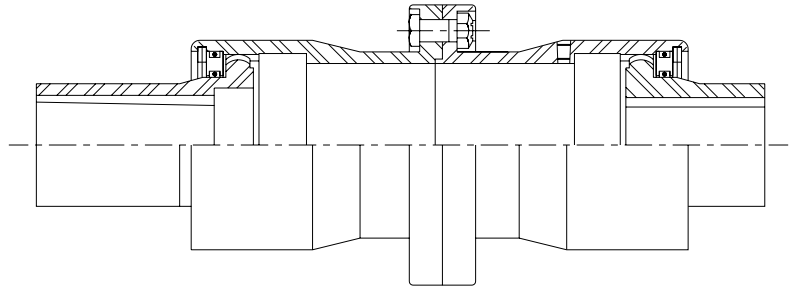


##### Light Weight Coupling

Made of extremely light weight, vacuum melted, AMS material with magnetic particle inspection. The overall length is 29.5 inches and the weight is 19.4 lbs.

##### Test Stand

High Speed Spacer coupling with internal support for instrumentation wires. Maximum speed of 7,000 RPM.

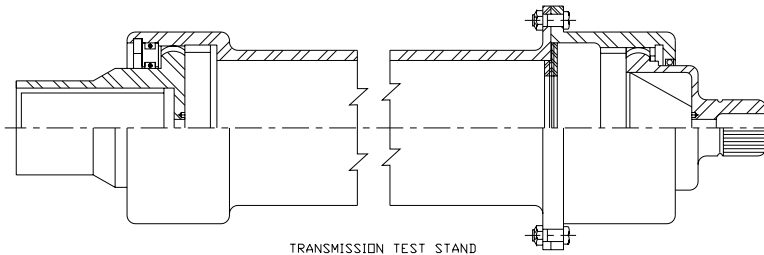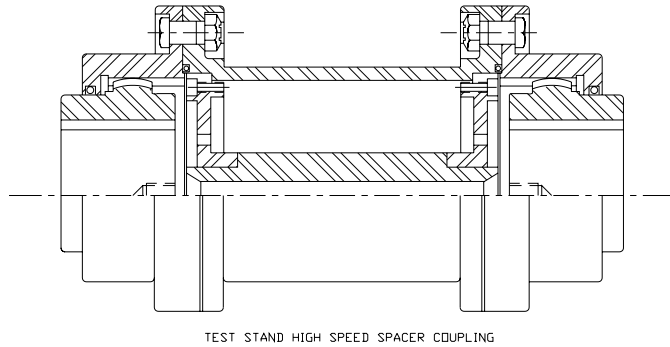


##### Transmission Test Stand

This High Speed Spacer coupling is grease packed and operates at a maximum speed of 6,000 RPM. Based on a size 3, the overall length is 55 inches.

##### Single Flange

This High Speed Spacer coupling is grease packed and operates at a maximum speed of 8,000 RPM. The total assembly weight is 19 lbs with an overall length of 19 inches.

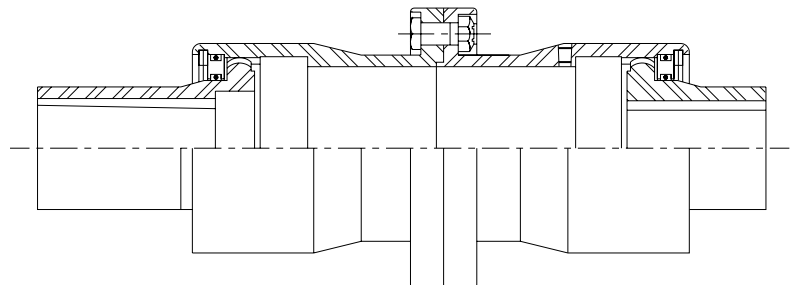

## High Speed Spindle Couplings

### Overview


### Lovejoy® SIER-BATH® Flanged Sleeve Type

### Spindle Couplings


#### Special Load and No Load Applications

For cases where a spindle coupling operates under a load at a given misalignment angle and requires a higher no load misalignment angle, we design special Vari-Crown® tooth forms. Such forms have compound curvature wherein the Vari-Crown is used for maximum radii of curvature at the load angle. At no load conditions the tooth ends are designed to eliminate edge loading and give proper tangential contact.


Available in several designs up to 40-inch diameter. Any variations of the designs shown can be incorporated to fit your application.

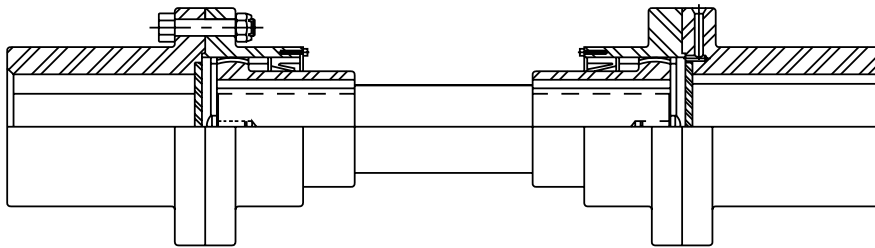


**Flanged Sleeve Main Drive Spindle Coupling**

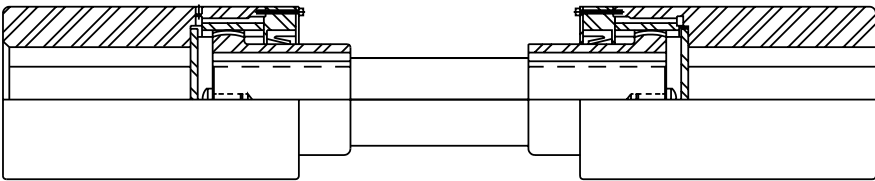


**Replaceable Gearing Spindle Coupling**

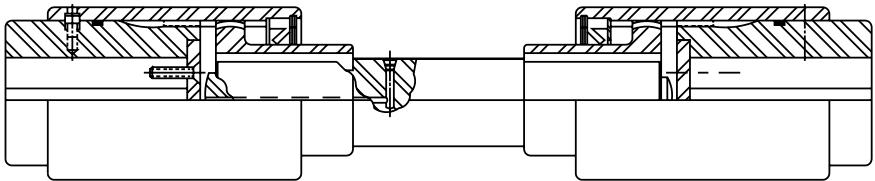

**Leveling and Pinch Roll Spindle Coupling**

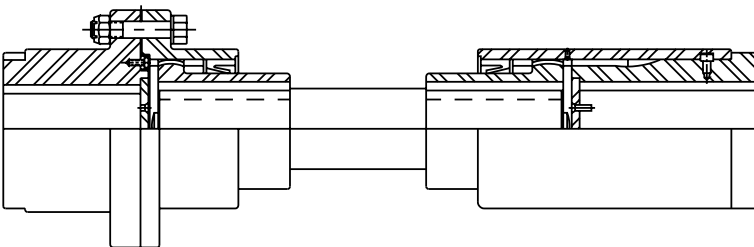

**Special Indexing Spindle Coupling**

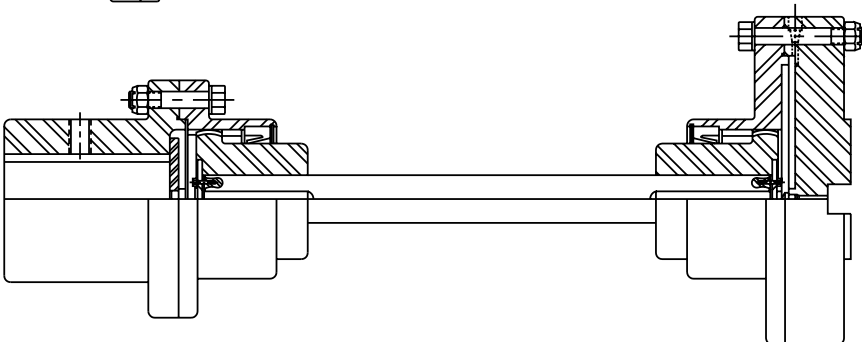

**Special Roll Drive Spindle Coupling**

Only a few special types of couplings are illustrated. Additional special types are available on request.